




Net168 (4CH/ 8CH)




Tracker168 (16CH)

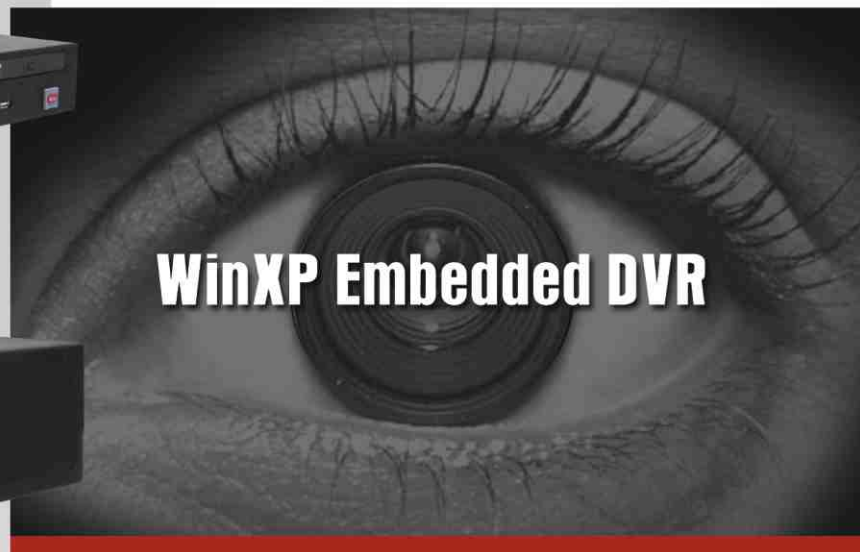

WinXP Embedded DVR

- WinXP Embedded OS (DOM Disk) _____**
No More Breakdown *1
- Full Range _____**
4ch, 8ch, 16ch
- High Resolution _____**
up to 640 x 480 pixels
- Quardplex _____**
Rec, Playback, Archive, Remote Viewing
- Hardware Watch Dog _____**
- Hot Standby Rec _____**
Always Recording *2
- Redundant Rec (optional) _____**
No more DataLoss
- Smart Motion Activity Search _____**
- POS Overlay (date/time, transaction log ...) *4 _____**

- Motion/Alarm Turbo Rec _____**
- E-mail Notification _____**
Hard Disk failure (or Alarm)
- Built-in CDR for Ease of Video Export (optional) _____**
Standard AVI format
Proprietary format with player
- Dynamic/ Static IP Supported _____**
- Bandwidth limitation _____**
- Time Synchronization (Network or Internet) _____**
- PSTN/ Internet Remote Viewer (supplied) _____**
- 3G Wireless Pocket Viewing & Control Software *3 (supplied) _____**
- Multi-site CMS (optional) _____**
up to 128 DVRs/ PC
- Access Control Overlay (date/time, card nr, name ...) *4 _____**

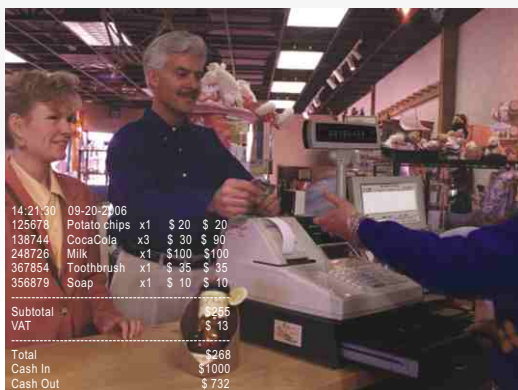

Notes: 1. Deduct the dead possibility caused by hard disk failure
 2. Support "Windows Mobile OS" 3G Handset ONLY
 3. The switching time to the other hard disk is about 1.5 minutes; DVR will NOT record during this period.
 4. Please contact us to have detailed tech info about the integration.

Specification


Model nr	Net168		Tracker168
Operation system	WinXP Embedded (stored in DOMModule)		
Codec	Proprietary M-JPEG + Wavelet		
Watch Dog Timer	Hardware		
Video - Video input	x 4	x 8	x 16
- Loop through	x 4	N/A	x 16
- VGAoutput	x 1	x 1	x 1
- Sequential output (composite)	N/A	N/A	x 4
Audio - Input	Optional		
- Speaker out	Optional		
Alarm Input	Dry contact x4	Dry contact x8	Dry contact x16
Control output	x 1	x 1	x 1
RS232 interface	x 2	x 2	x 2
TCPIP (internet)	RJ45 x 1	RJ45 x 1	RJ45 x 1
Hot Standby REC	Yes (valid for more than two HDDs configuration ONLY)		
Redundancy REC	Yes (valid for more than two HDDs configuration ONLY)		
Display rate (max) - Spot mode	120 f/s		120 f/s
- Divided mode	60 f/s		120 f/s
Display resolution (max)	640 x 480 pixels		
Recording rate (max.)	60 f/s		120 f/s
Recording resolution (max.)	640 x 480 pixels		
Recording quality	Low, Fair, Good, Better, Best		
Compression ratio	600:1 (1.5kB)		
Nr of installed hard disk (IDE Type, max)	x 2 (160/250/ 500 GB)		x 3 (160/ 250/ 500 GB)
Water Mark	Yes		
Built-in CD Writer for AVI Export	Optional		Optional
AVI export media	CD Writer, external USB memory stick & etc..		
System alarm	Video Loss, Motion, External Alarm		
PTZ Control	Pelco, Panasonic, Kalatel, Bosch & others.		
Power source	90 to 264Vac, 50/60 Hz Switching		
Power consumption	< 50 W	< 50 W	< 185 W
Weight	Net:13.23 LB(6kg), Gross:17.64LB(8kg)		Net:33.07LB(15kg), Gross:41.89LB(19kg)
Dimension	335x435x45 (mm) 13.18x17.13x1.77 (inch)		473x430x111 (mm) 18.62x16.93x4.37 (inch)
Approval	CE, FCC		

Specifications are subject to change without prior notice



Telexper Inc.
33235 Transit Avenue,
Union City, CA 94587 U.S.A.
Tel : +1.510.477 9150
Fax: +1.510.477 9644

Telexper International Inc.
3F-3, No. 2, Chien Pa Rd.,
Chung Ho City, Taipei 235,
Taiwan, R.O.C.
Tel : +886.2.6620 5898
Fax: +886.2.6620 6909



168embedded-5-1